


FaceDeep 3

Smart Face Recognition Terminal




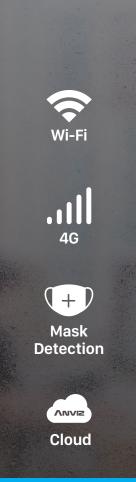

- New generation touchless solution for the people to access control on the entrance or record time attendance and simultaneously check mask-wearing without having to touch a terminal or gate.
- Built-in IR and visual cameras integrated with Anviz's unique BioNANO[®] algorithm to produce the best in class live face recognition performance.
- Equipped with a 5" IPS touch screen.
- Register up to 10,000 users for dynamic face authentication.
- Recognition distance up to 1.5 M with matching speed < 0.3s by 1: 10,000.
- Optional battery backup, specifically designed to work consistently in unstable power supply environments, such as Construction sites, Manufacturing, Schools and buildings in countryside, etc.

FaceDeep 3 **Product** Model FaceDeep 3 FaceDeep 3 Pro FaceDeep 3 4G Identification mode Face, Card, ID+Password 0.5 ~ 1.5m (19.69 ~ 59.06") Face Recognition Distance General <0.3 S Face Recognition Speed 13.56MHz Mifare 13.56MHz Mifare RFID Technology 125KHz EM IRT (Palm Temperature Detection Distance Temperature Range Detection) Temperature Accuracy* Max Users 6,000 10,000 10.000 Capacity 10,000 Max Cards 6.000 10,000 Max Logs 100.000 Time Attendance Mode Group, Time Zone 16 Access Groups, 32 TimeZone Function Record Auto Inquiry Clock Bell Multiple Language Dual 1.0GHz CPU Camera Dual Camera(VIS & NIR) Scanning Area Horrizontal: ±20° Vertical: ±20° Display 5" TFT touch Screen Resolution 720*1280 Hardware Smart LED Dimensions(W x H x D) 146*165*34 mm(5.75*6.50*1.34") Working Temperature -5°C~60°C (23°F~160°F) Humidity 0% to 95% Power Input DC 12V 2A TCP/IP RS485 USB PEN Wi-Fi+Bluetooth \/ Interface 1 Relay Out Temper Alarm Wiegand 1 In &1 Out Door Contact CrossChex Standard Software Ompatibility √ CrossChex Cloud

System Configurations

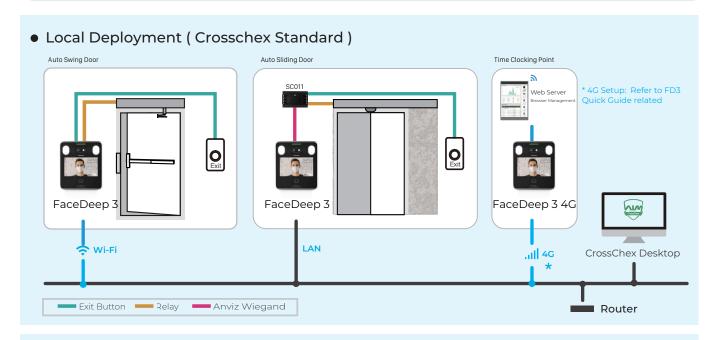

• Cloud Deployment (Crosschex Cloud)







* 4G Setup: Refer to FD3 Quick Guide Related

Tel: +971 4 269 4620 | Email: sales@idvisionme.com | www.idvisionme.com